



高速自動封切機

AUTO HIGH-SPEED SEALING & CUTTING MACHINE

厚袋専用自動封切機

THICK-BAG AUTOMATIC SEALING & CUTTING MACHINE

この品物は輸出品につき航空機搭乗までは開封したり他人に譲渡してはいけません
NOTICE: NOT TO BE OPENED OR TRANSFERRED BEFORE ON BOARD

SPRIT



高速自動封切機

AUTO HIGH-SPEED SEALING & CUTTING MACHINE

■可增設裝置：

- 1、加裝自動輸送機裝置。
- 2、可改裝專門製背心袋並自動成疊。
- 3、送料部，可改為兩線分開自動送料。

■本機特點：

- 1、主機馬達使用電子式無段控制變速。
- 2、全部採用電子控制以達自動化控制。
- 3、利用電磁式離合器及制動器使封切袋子之尺寸誤差小。
- 4、停車時自動定位。
- 5、擋袋自動停車。
- 6、精密度電眼，自動封切印刷物。
- 7、操作簡便封口牢固。
- 8、高速作業，節省人力時間。

OPTIONAL ACCESSORIES AS FOLLOWS:

- 1.AUTO CONVEY FEEDING EQUIPMENT.
- 2.IT WILL BE EXCHANGE TO MANUFACTURE VEST SHOPPING BAGS AND AUTO STACK.
- 3.ITWILL BE EXCHANGE TO 2 LINES SORTING & AUTO FEEDING.

FEATURE:


- 1.MAIN MOTOR IS ELECTRIC CONTROL SPEED.
- 2.FULLY-AUTO ELECTRIC CONTROL SPEED.
- 3.ELECTROMAGNETIC CLUTCH AND BRAKE WHICH ENSURE BAG FOR CUTTING AND SEALING ACCURATE.
- 4.IT WILL BE AUTO SETTING WHEN YOU PUSH THE STOP-BUTTON.
- 5.IT CAN ACCUMULATE BAGS AND AUTO STOP.
- 6.HI-SENSITIVITY ELECTRONIC SENSOR WHICH CAN AUTO SEAL & CUT PLASTIC FILMS.
- 7.EASY OPERATING AND SEAL PERFECTION.
- 8.FAST OPERATING THAT CAN SAVE TIME AND WAGE.

| 型式 MODEL | 切刀寬 CUTTER "W" | 封切長 CUTTING "L" | 每分速度 P.C S/MIN | 長度誤差 ACCURACY "L" | 封切厚度 CONVERTING THICKNESS | 機械長度 | | | 機械重量 MACHINE WEIGHT | 動力 MOTOR | 電熱 HEATER | 全台備電 POWER REQUIRED | 裝箱長度 | | | 裝箱重量 GROSS WEIGHT | 備考 REMARKS |
|-------------|----------------------|-----------------------|-------------------|-------------------------|---------------------------------|-------|----------------|------|---------------------------|-------------|--------------|---------------------------|------|--------------|------|-------------------------|---------------|
| | | | | | | L | DIMENSION W | H | | | | | L | PACKING W | H | | |
| SDH-264 | 26" | 4"-40" | 4-130 | ±2/1000% | 0.015-0.10% | 2.59M | 1.25M | 1.5M | 600KG | 1P | 1.2KW | 2.5KW | 2.4 | 1.5 | 1.65 | 700KG | |
| SDH-326 | 32" | 6"-60" | 25-100 | ±2/1000% | 0.015-0.10% | 2.98M | 1.45M | 1.4M | 680KG | 2P | 1.5KW | 4.0KW | 2.4 | 1.65 | 1.65 | 850KG | |
| SDH-406 | 40" | 6"-60" | 25-100 | ±2/1000% | 0.015-0.10% | 2.98M | 1.65M | 1.7M | 750KG | 2P | 1.8KW | 4.5KW | 2.4 | 1.85 | 1.9 | 980KG | |

* 規格變更不另行通知 Specifications are subject to change due to technological improvement.

Usable Film Materials

LDPE tube film
HDPE tube film
LLDPE tube film

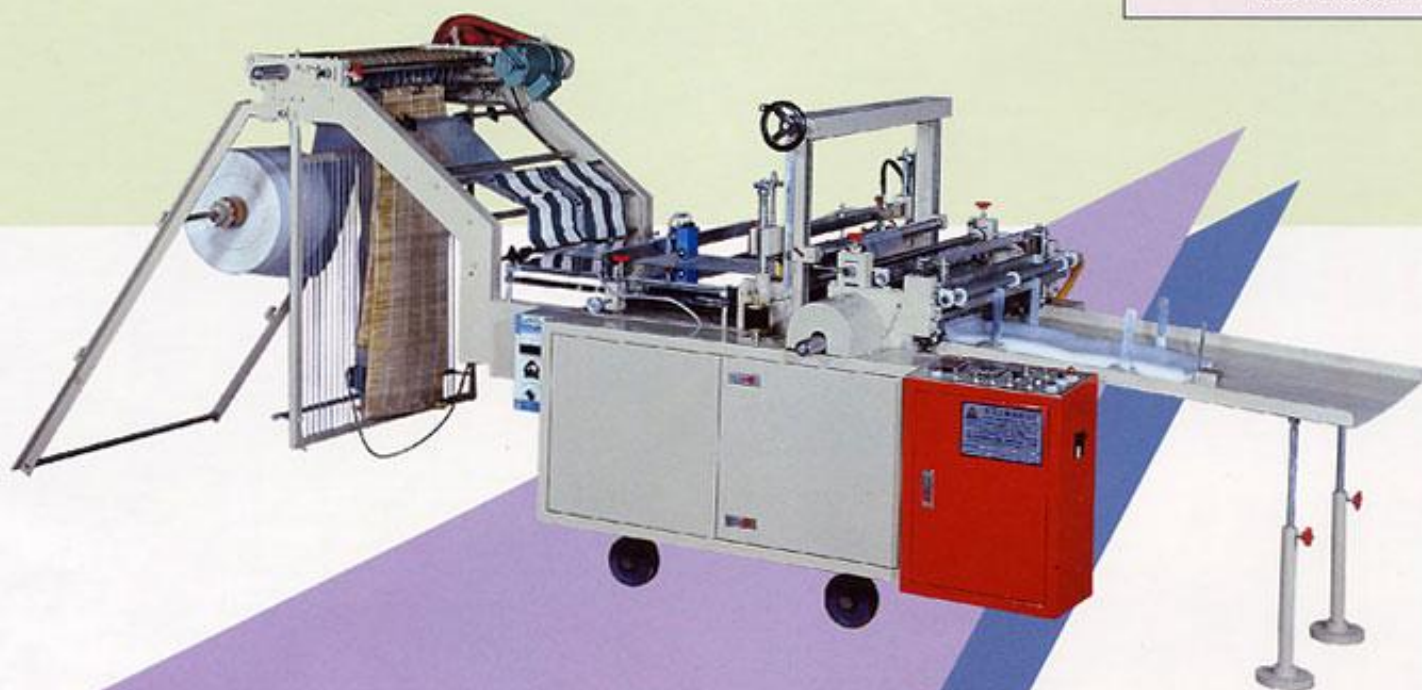

厚袋專用自動封切機

THICK-BAG AUTOMATIC SEALING & CUTTING MACHINE

■本機特點：

- 1、多片式封刀能使袋子封底更堅固美觀。
- 2、製造較厚之袋子如：手提袋、鹽袋、原料袋、米袋、冷凍袋、藥子袋、巴樂袋、石粒袋、糖袋、螺絲袋、農藥袋等。


OUTSTANDING QUALITIES:

1. POLY-SEALING KNIVES MAKE THE SEALED FOUNDATION OF THE BAGS FIRM AND PRETTY.
2. TO MANUFACTURE THICK POLY-BAG SUCH AS: HANDBAG, SALT BAG, MATERIAL BAG, RICE BAG, PEFRIGATION BAG, JUJUBE BAG, GUAVA BAG, PEBBLE BAG, SUGAR BAG, SCREW BAG, PESTICIDE BAG, ETC.

| 型式 MODEL | 切刀寬 CUTTER "W" | 封切長 CUTTING "L" | 每分速度 P.C.S/MIN | 長度誤差 ACCURACY "L" | 封切厚度 CONVERTING THICKNESS | 機械長度 | | | 機械重量 MACHINE WEIGHT | 動力 MOTOR | 電熱 HEATER | 全台備電 POWER REQUIRED | 裝箱長度 | | | 裝箱重量 GROSS WEIGHT | 備考 REMARKS |
|-------------|----------------------|-----------------------|-------------------|-------------------------|---------------------------------|------|----------------|-------|---------------------------|-------------|--------------|---------------------------|------|--------------|-------|-------------------------|---------------|
| | | | | | | L | DIMENSION W | H | | | | | L | PACKING W | H | | |
| SDH-2630 | 26" | 3-30" | 20-70 | 2/1000% | 0.03-0.40% | 3.5M | 1.00M | 1.30M | 560KG | 2P | 1.5KW | 3.5KW | 3.7M | 1.4M | 1.80M | 780KG | |
| SDH-3230 | 32" | " | 20-50 | " | 0.03-0.40% | 3.5M | 1.15M | 1.60M | 600KG | 2P | 1.7KW | 4.0KW | 3.7M | 1.6M | " | 850KG | |

專利新型第一二八九五號
厚袋膠袋封切機之獨立單件
聯封口裝置（上下加熱）

PATENT NO 12895, NEW STYLE
A sealing and cutting machine for thick poly bag offers independent unit of single sealing (heating both upward and downward)

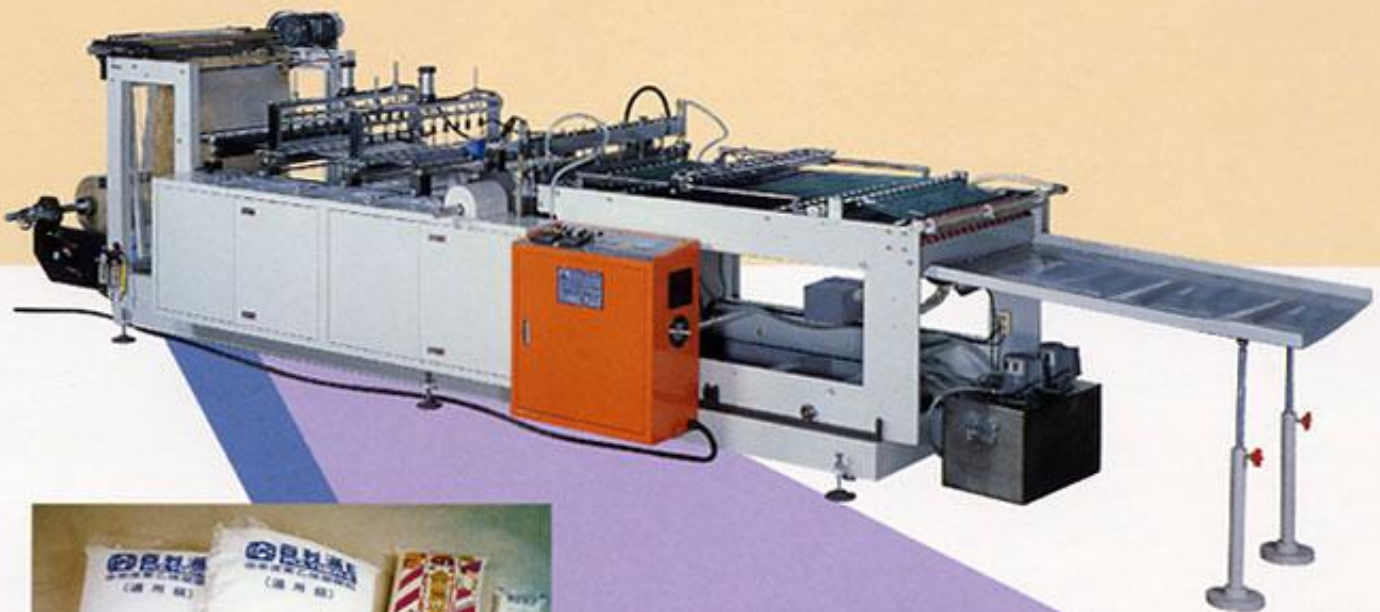

世岱工業股份有限公司

S-DAI INDUSTRIAL CO.,LTD.

